


4 Channel Micro Contact Input

Version: 1.0.6

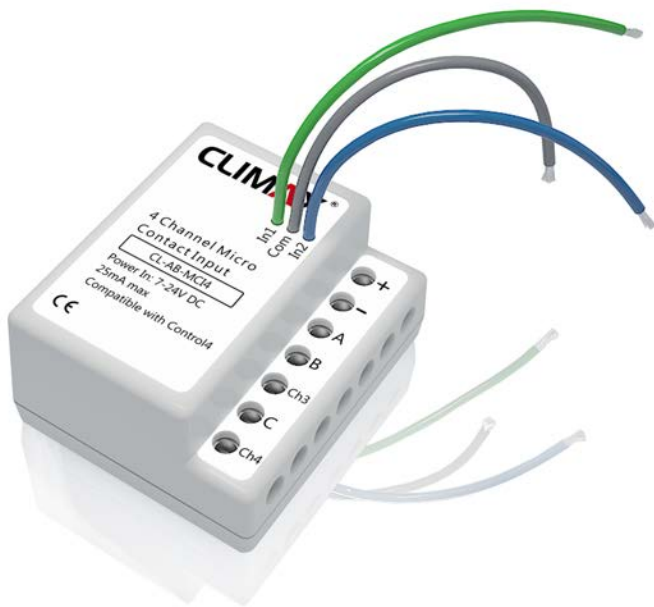

- ✓ Compaible with smarthome s ystems
- ✓ Quick and easy installaon
- ✓ equipped with address selector switch
- ✓ Four Contact Input Sensors with different trigger voltage
- ✓ Fits in standard US/EU/UK-style wall boxes

4 Channel Micro Contact Input

The 4 Channel Micro Contact Input offers four input channels to interact with smart home systems. Each channel uses toggle switches to trigger lights, scenes or any other automaon event.

This new and well designed module is smaller in size and equipped with address selector switch which makes it a very handy device for installer. The 4 Channel Micro Contact Input comes in 4 different part numbers and it can trigger in different voltages. The device can be connected to any door/window contact sensor, PIR, water/gas leak sensor, smoke detector, etc and it is designed to be easily installed inside standard US/EU/UK-style wall boxes.

This product let users enjoy the real experience of living in a smart home. It can be seamlessly integrated into home automaon systems via "RS-232 GatewayPro". By installing this module in a project, any type of contact switch/sensor will be considered as a part of smart home system.

4 Channel Micro Contact Input

Version: 1.0.6

Product Specification

Technical Specification				
<i>Control Voltage</i>	<i>Free Voltage</i>	<i>Low (5V-24V)</i>	<i>Medium (110V)</i>	<i>High (240V)</i>
<i>Part Numbers</i>	<i>CL-AB-MCI4</i>	<i>CL-AB-MCI4-LV</i>	<i>CL-AB-MCI4-MV</i>	<i>CL-AB-MCI4-HV</i>
<i>Input Voltage</i>	<i>7V-24V DC (24V DC is recommended)</i>			
<i>Input Current</i>	<i>25mA (for 24V DC)</i>			
<i>I/O Connections</i>	<i>C-Bus</i>	<i>4 X screw terminal (M3 socket set screw*)</i>		
	<i>Control Input</i>	<i>4 X digital contact input</i>		
<i>*Hex key size: 1.5 mm</i>				
Dimensions				
<i>Net</i>	<i>Length</i>	<i>46.6 mm</i>		
	<i>Width</i>	<i>40.2 mm</i>		
	<i>Height</i>	<i>23.6 mm</i>		
<i>Packaged</i>	<i>Length</i>	<i>134.0 mm</i>		
	<i>Width</i>	<i>107.0 mm</i>		
	<i>Height</i>	<i>40.0 mm</i>		
Environmental				
<i>Temperature</i>	<i>Operational</i>	<i>32° F - 95° F (0° C - 35° C)</i> <i>All load ratings are based on an ambient temperature of 25° C.</i>		
	<i>Storage</i>	<i>14° F – 140° F (-10° C –60° C)</i>		
<i>Humidity</i>	<i>Operational</i>	<i>5% to 80% non-condensing</i>		
	<i>Storage</i>	<i>5% to 95% non-condensing</i>		
Miscellaneous				
<i>Housing</i>	<i>Acrylonitrile butadiene styrene (ABS)</i>			
<i>Color</i>	<i>Light Almond</i>			
Weight				
<i>Net</i>	<i>34±5 gr</i>			
<i>Packaged</i>	<i>84±5 gr</i>			